Product data sheet
Characteristics

VDIP184546005
Actassi CL-MNC5e Patchcord F/UTP 4P Cat5e 155MHz LSZH 0.5m Grey

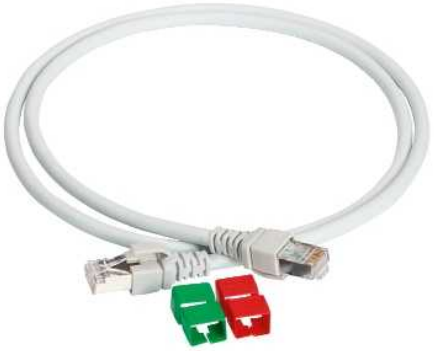

Main

Range	Actassi
Product	Patch cord
Product compatibility	Coloured clips blue Coloured clips yellow Coloured clips green Coloured clips red
Performance	5e
Colour	Grey patchcord

Complementary

Provided equipment	Coloured clips red Coloured clips green Coloured clips grey
Cable shielding type	F/UTP
Communication network type	10GBASE-T
Transmission frequency	155 MHz
Input impedance	100 Ohm
Connector type	RJ45
Material	PE (polyethylene) wire insulation Solid bare copper conductor
Standards	ISO/IEC 11801:2011 Ed.2.2 EN 50173 Ed.3 EIA/TIA-568-C.2 IEC 61935-2
Product certifications	Delta
Quantity per set	1
Cable length	0.5 m

Environment

Environmental characteristic	LSZH (low smoke zero halogen) jacket
Temperature range	-20...60 °C
Ambient air temperature for storage	-20...60 °C
Ambient air temperature for installation	0...50 °C
Temperature resistance	60 °C

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.